


Threaded power brushes

Knot wheels

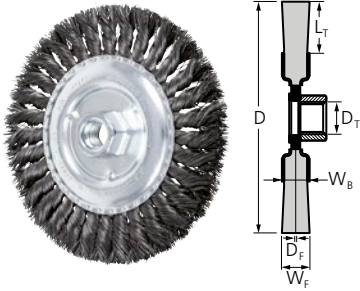

Standard twist


This brush features knots that are twisted approximately 75% of the trim length. The loosely-twisted knots cover a larger surface area and are ideal for heavy-duty cleaning and surface conditioning on uneven surfaces. For weld cleaning, weld spatter removal, scale removal, cleaning, deburring, and flash removal.


Advantages:

- Loosely-twisted knots cover a large surface area.
- Good balance between aggressiveness and flexibility.

Recommendations for use:

- For use on right angle grinders.

D [Inches]	D _T [Inches]	Knots [pcs.]	L _T [Inches]	W _F [Inches]	D _F [Inches] and EDP number				Opt. RPM	Max. RPM	
					.014	.016	.020	.023			
Carbon steel wire											
4	5/8-11	22	7/8	5/8	82153P	-	82154	-	10,000–15,000	20,000	10/5
5	5/8-11	24	5/8	5/8	-	-	82470	-	7,500–15,000	15,000	10
6	5/8-11	32	1-1/8	5/8	82471	82472	-	82473	4,500–9,000	9,000	10
Stainless steel wire (INOX)											
4	5/8-11	22	7/8	5/8	82283P	-	82284	-	8,000–15,000	20,000	10/5
5	5/8-11	24	5/8	5/8	-	-	82596	-	6,000–15,000	15,000	10
6	5/8-11	32	1-1/8	5/8	-	82597	-	82598	3,500–9,000	9,000	10
Brass wire											
4	5/8-11	22	7/8	5/8	82366	-	-	-	8,000–15,000	20,000	10

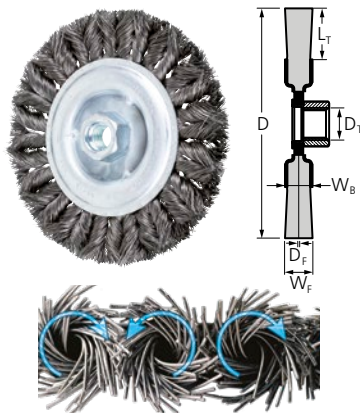

Standard twist, COMBITWIST®

This brush features knots that are twisted approximately 75% of the trim length. The loosely-twisted knots cover a larger surface area and are ideal for heavy-duty cleaning and surface conditioning on uneven surfaces. For weld cleaning, weld spatter removal, scale removal, cleaning, deburring, and flash removal.


Advantages:


- Loosely-twisted knots cover a large surface area.
- Good balance between aggressiveness and flexibility.
- COMBITWIST® knot construction results in improved balance, reduced vibration, and extended service life.

Recommendations for use:

- For use on right angle grinders.

PFERDVALUE®:



D [Inches]	D _T [Inches]	Knots [pcs.]	L _T [Inches]	W _F [Inches]	D _F [Inches] and EDP number				Opt. RPM	Max. RPM	
					.014	.016	.020	.023			
Carbon steel wire											
4	5/8-11	22	7/8	5/8	82383	-	82384	-	10,000–15,000	20,000	10
5	5/8-11	24	5/8	5/8	-	-	82680	-	7,500–15,000	15,000	10
6	5/8-11	32	1-1/8	5/8	82681	82682	-	82683	4,500–9,000	9,000	10
Stainless steel wire (INOX)											
4	5/8-11	22	7/8	5/8	82412	-	82413	-	8,000–15,000	20,000	10
5	5/8-11	24	5/8	5/8	-	-	82749	-	6,000–15,000	15,000	10
6	5/8-11	32	1-1/8	5/8	-	82752	-	82753	3,500–9,000	9,000	10



Brushes available in POP packaging are marked with a "P" in this catalogue. To order brushes in POP versions, please add a "P" to the end of the EDP number.

The box quantity of POP items is printed in "blue" accordingly.