

VELOCITY2 MEDIUM & HEAVY DUTY MIG WELDING CONSUMABLES

Medium Duty Contact Tips

DESCRIPTION	PART NO.	STOCK NO.
.023" (0.6 mm)	VTM23	1160-1750
.030" (0.8 mm)	VTM30	1160-1751
.035" (0.9 mm)	VTM35	1160-1752
.040" (1.0 mm)	VTM40	1160-1753
.045" (1.2 mm)	VTM45	1160-1754
3/64" (1.2 mm)*	VTMA364*	1160-1755
.052" (1.3 mm)	VTM52	1160-1756
1/16" (1.6 mm)	VTM116	1160-1757
1/16" (1.6 mm)*	VTMA116*	1160-1758
5/64" (2.0 mm)	VTM564	1160-1759

Heavy Duty Contact Tips

DESCRIPTION	PART NO.	STOCK NO.
.030" (0.8 mm)	VTH30	1160-1760
.035" (0.9 mm)	VTH35	1160-1761
.040" (1.0 mm)	VTH40	1160-1762
.045" (1.2 mm)	VTH45	1160-1763
3/64" (1.2 mm)*	VTHA364*	1160-1764
.052" (1.3 mm)	VTH52	1160-1765
1/16" (1.6 mm)	VTH116	1160-1766
1/16" (1.6 mm)*	VTHA116*	1160-1767
5/64" (2.0 mm)	VTH564	1160-1768
3/32" (2.4 mm)	VTH332	1160-1769
7/64" (2.8 mm)	VTH764	1160-1770
1/8" (3.2 mm)	VTH18	1160-1771

Extended Taper Contact Tips

DESCRIPTION	PART NO.	STOCK NO.
.030" (0.8 mm)	VTET30	1160-1772
.035" (0.9 mm)	VTET35	1160-1773
.040" (1.0 mm)	VTET40	1160-1774
.045" (1.2 mm)	VTET45	1160-1775
3/64" (1.2 mm)*	VTETA364*	1160-1776
.052" (1.3 mm)	VTET52	1160-1777
1/16" (1.6 mm)	VTET116	1160-1778

Extended HD Taper Contact Tips

DESCRIPTION	PART NO.	STOCK NO.
.035" (0.9 mm)	VTHET35	1160-1780
.045" (1.2 mm)	VTHET45	1160-1782
.052" (1.3 mm)	VTHET52	1160-1784
1/16" (1.6 mm)	VTHET116	1160-1785

Note: All Contact Tips are packaged in quantities of ten (10) per bag and all Nozzles are packaged in quantities of two (2) per bag.

Medium Duty Nozzles

Self Insulated Nozzles. 2 per pack

DESCRIPTION	PART NO.	STOCK NO.
1/2" (12.7 mm) Threaded Nozzle Recess	VNM50	1240-1857
1/2" (12.7 mm) Threaded Nozzle Flush	VNM50F	1240-1856
5/8" (15.9 mm) Threaded Nozzle Recess	VNM62	1240-1854
5/8" (15.9 mm) Threaded Nozzle Flush	VNM62F	1240-1855
3/4" (19.1 mm) Threaded Nozzle Recess	VNM75	1240-1852
3/4" (19.1 mm) Threaded Nozzle Flush	VNM75F	1240-1853
1/2" (12.7 mm) Slip Nozzle	VNM50S	1240-1859
5/8" (15.9 mm) Slip Nozzle	VNM62S	1240-1860
3/4" (19.1 mm) Slip Nozzle	VNM75S	1240-1863
Slip Nozzle Base	VNS	1240-1864
1/2" (12.7 mm) Slip Nozzle Cone Only	VNM50SC	1240-1861
5/8" (15.9 mm) Slip Nozzle Cone Only	VNM62SC	1240-1862
3/4" (19.1 mm) Slip Nozzle Cone Only	VNM75SC	1240-1865
Flux Core Nozzle	VNLFC	1240-1892
5/8" (15.9 mm) Spot Nozzle	VNM62FAS	1240-1866
3/4" (19.1 mm) Spot Nozzle	VNM75FAS	1240-1868

Heavy Duty Nozzles

Self Insulated Nozzles. 2 per pack


DESCRIPTION	PART NO.	STOCK NO.
5/8" (15.9 mm) Threaded Nozzle Recess	VNH62	1240-1877
5/8" (15.9 mm) Threaded Nozzle Flush	VNH62F	1240-1878
3/4" (19.1 mm) Threaded Nozzle Recess	VNH75	1240-1875
3/4" (19.1 mm) Threaded Nozzle Flush	VNH75F	1240-1876
5/8" (15.9 mm) Slip Nozzle	VNH62S	1240-1893
3/4" (19.1 mm) Slip Nozzle	VNH75S	1240-1894
Slip Nozzle Base	VNS	1240-1864
1/2" (12.7mm) 2 Piece Nozzle Cone Only Recess	VNH50RC	1240-1867
5/8" (15.9 mm) Slip Nozzle Cone Only	VNH62SC	1240-1895
3/4" (19.1 mm) Slip Nozzle Cone Only	VNH75SC	1240-1896
5/8" (15.9 mm) 2 Piece Nozzle Assembly Recess	VNH622PC	1240-1880
5/8" (15.9 mm) 2 Piece Nozzle Cone Only Recess	VNH62C	1240-1884
5/8" (15.9 mm) 2 Piece Nozzle Assembly Flush	VNH62F2PC	1240-1881
5/8" (15.9 mm) 2 Piece Nozzle Cone Only Flush	VNH62FC	1240-1885
3/4" (19.1 mm) 2 Piece Nozzle Assembly Recess	VNH752PC	1240-1882
3/4" (19.1 mm) 2 Piece Nozzle Cone Only Recess	VNH75C	1240-1886
3/4" (19.1 mm) 2 Piece Nozzle Assembly Flush	VNH75F2PC	1240-1883
3/4" (19.1 mm) 2 Piece Nozzle Cone Only Flush	VNH75FC	1240-1887
Nozzle Retainer	VNH2PC	1240-1879
Flux Core Tip Holder & Insulator	VNSFC	1220-1207

Extended Taper Nozzle

Extended Taper Nozzle	VNET37F	1240-1897
-----------------------	----------------	-----------

Note: VELOCITY2 medium and heavy duty contact tips and nozzles are for use with Tweco Classic® No. series and Spray Master® series MIG Guns.

VELOCITY2 Nozzle Identification

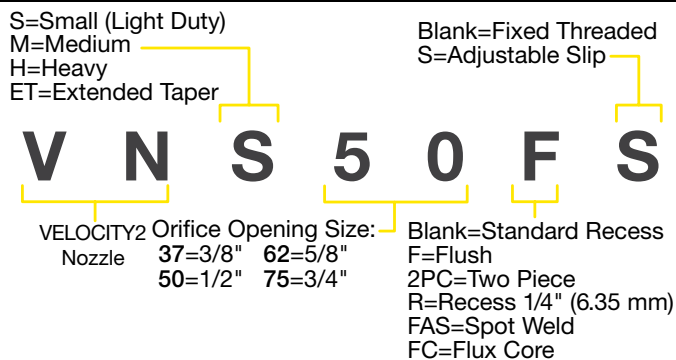

VELOCITY2 Contact Tip Identification

