

Cable Connectors

Cam-Lok Twistlock Receptacles/Connectors

Item #	Part #	Description	Color	Cable Capacity
1	039628	Receptacle, Insul. (Female)	Black	No. 2/0 – 3/0 (25 – 70 mm)
	039638	Receptacle, Insul. (Female)	Black	No. 3/0 – 4/0 (70 – 95 mm)
2	056271	Receptacle, Uninsul. (Male)	Black	—
3	039633	Connector, Insul. Set Scr. (In-Line Female)	Red	No. 1/0 – 3/0 (50 – 70 mm)
4	039629	Connector, Insul. Set Scr. (Male)	Red	No. 2 – 1/0 (35 – 50 mm)
	039630	Connector, Insul. Set Scr. (Male)	Red	No. 1/0 – 3/0 (50 – 70 mm)
	039639	Connector, Insul. Set Scr. (Male)	Red	No. 3/0 – 4/0 (70 – 95 mm)

¹For In-Line Connections, use with **039629** or **039630**.


Miller Receptacles/Connectors

Item #	Part #	Description	Color	Cable Capacity
5	039801	Receptacle, Insulated (Female)	Black	—
	039800	Receptacle, Insulated (Female)	Red	—
	057608	Receptacle, Insulated (Female)	Yellow	—
6	039901	Plug, Insulated (Male)	Black	No. 1 – 4
	039608	Plug, Insulated (Male)	Red	No. 1 – 4
	039878	Plug, Insulated (Male)	Yellow	No. 1 – 4
7	039611	Connector, Insulated (Female)	Black	No. 1 – 4

²For In-Line Connections (Quick-Connect).

Tweco-Style Twistlock Receptacles/Connectors

Item #	Part #	Part #	Description
	209219	218183	Receptacle Assembly (Female)
8	208431	209473	Receptacle, Brass (Female)
9	—	186228	O-Ring, 0.739 ID x 0.070 H
10	—	185712	Insulator, bulkhead front
11	—	185718	O-Ring, 0.989 ID x 0.070 H
12	—	185713	Insulator, bulkhead rear
13	229338	—	Washer, domed load .812 ID x 1.450 OD x .070 THK
14	—	185714	Tooth washer, 1 mm intern
15	185717	185717	Nut, M20-1.5 1.00 Hex .19 H BRS locking
16	191981	191981	Connector, Insulated (Male), No. 4 – 1/0 - 2/0 (25 – 50 mm)
17	218677	218677	Connector, Insulated (Female), No. 4 – 1/0 - 2/0 (25 – 50 mm)
18	218678	218678	Adapter, Threaded Stud to Tweco (stud hole dia. 5/8 in)
	242251	—	Connector, TW LK Insulated Female (Tweco-Lenco Type) HD 3/0-4/0

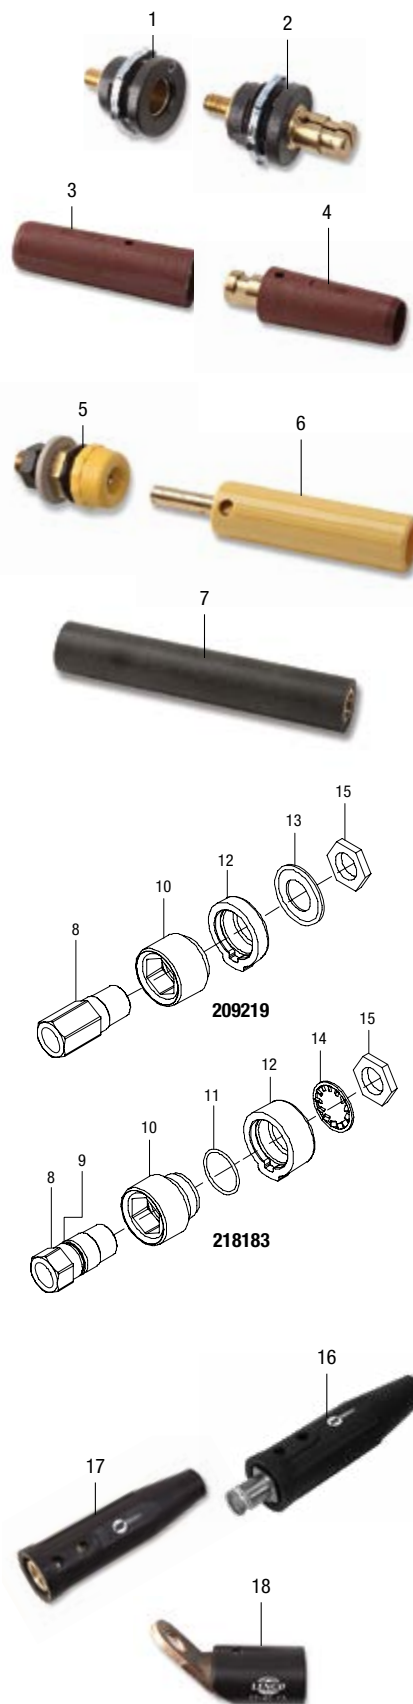



Cable Connectors

Dinse™ Twistlock Receptacles (50/70 Series)

Item #	Part #	Part #	Part #	Part #	Description
	208967	202813	129525	186092	Receptacle Assembly (Female)
1	208968 (N/A)	—	—	202811	Receptacle, Brass with O-ring (Female) (consists of items 2 and 3)
2	185711 (N/A)	202553	210752 (N/A)	202554 (N/A)	Receptacle, Brass (Female)
3	185710	—	—	185710	O-Ring, 0.296 ID x 0.139 H Silicone
4	186228	186228	—	186228	O-Ring, 0.739 ID x 0.070 H
5	185712	185712	208760 (N/A)	185712	Insulator, bulkhead front
6	185718	185718	—	185718	O-Ring, 0.989 ID x 0.070 H
7	185713	185713	208430 (N/A)	185713	Insulator, bulkhead rear
8	—	—	229338	—	Washer, domed load .812 ID x 1.450 OD x .070 THK
9	185714	185714	—	185714	Tooth washer, 1 mm intern
10	185717	185717	185717	185717	Nut, M20-1.5 1.00 Hex .19 H BRS locking
11	—	—	229333	—	Screw, M10-1.5x 20 Hex HD-PLN 8.8 PLD SEMS

Dinse™ Twistlock Receptacles/Connectors

Item #	Part #	Series	Description	Cable Capacity/Thread Size
12	127837	25	Receptacle, Insulated (Female)	—
13	143419	50	Receptacle, Insulated (Male)	—
14	208698	25	Receptacle, Brass Power Pos. (Female)	—
15	208699	25	Receptacle, Brass Power/Gas Neg. (Female) with O-Ring #188 380 (.174 ID x .103 H)	—
16	127835	25	Connector, Insulated (Female)	No. 3 – No. 4
	129526	50	Connector, Insulated (Female)	No. 2 – 1/0 (35 – 50 mm)
	136600	70	Connector, Insulated (Female)	No. 1/0 – 3/0 (50 – 70 mm)
	138180	95	Connector, Insulated (Female)	No. 3/0 – 4/0 (70 – 95 mm)
17	127836	25	Connector, Insulated (Male)	No. 3 – No. 4
	129527	50	Connector, Insulated (Male)	No. 2 – 1/0 (35 – 50 mm)
	134460	70	Connector, Insulated (Male)	No. 1/0 – 3/0 (50 – 70 mm)
	241354	95	Connector, Insulated (Male)	No. 3/0 – 4/0 (70 – 95 mm)
18	273483	25	Connector, Insulated (Male) Flow-Thru	3/8-24R
19	194722	50	Connector, Insulated (Male) Flow-Thru 125/150 A	3/8-24R
	194723	50	Connector, Insulated (Male) Flow-Thru 200 A	7/8-14R
20	232728	50/70	Adapter, Threaded Stud to Dinse (stud hole dia. 1/2 in)	
21	145739 (N/A)		Sleeve, clamping	

Spectrum Connectors

Item #	Part #	Description
	263801	Connector, TW LK Insulated Male (Tweco-Lenco Type) SK 10-25

Maxstar 700/Dynasty 700 Connectors

Item #	Part #	Description
	225029	Connection Kit, Thread Lock Double Dry
	225028	Adapter, Torch-Thread Lock Water (7/8 LHT)

